


Homag EDGETEQ S-200 series-

HOMAG

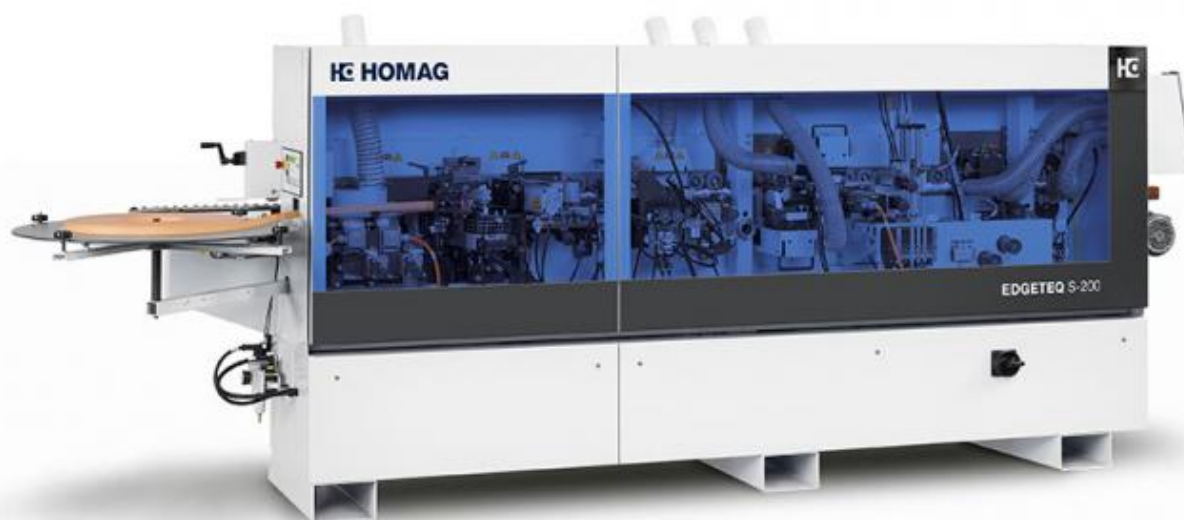

Auckland
19 Allens Road, East Tamaki
Auckland 2013
Ph (09) 271 7700
Fax (09) 271 7728

Christchurch
159 Ferry Road, Waltham
Christchurch 8011
Ph (03) 366 2013
Fax (03) 366 2021

Call free: 0800 522 577
Copyright © 2025 W & R Jack Limited.



Homag EDGETEQ S-200 series-



[Check out our Ho Ho HOMAG Christmas special promotion! >>](#)

Homag is the worldwide market leader of edgebanders, and their EDGETEQ range is perfectly suited to the small to mid-sized companies of New Zealand.

Compact and affordable, and based on the popular 'Ambition' range (previously branded 'Brandt'), Homag's EDGETEQ S-200 machines offer precision, near invisible glue lines and no more 'hand finishing.' Their high-tech 'line control' virtually eliminates much of the set-up process.

Flexibility and intuitive operation characterise the compact edgebanding machines of the entry-level EDGETEQ S-200 Series:

- Complete processing of edgings at an excellent price-to-performance ratio
- 6 different models to meet every requirement
- Perfect edges
- Optimum entry-level machine
- Short, compact machine
- Intuitive operation - innovative easyTouch control system
- Highly flexible configuration
- Proven technology that will last and last

For the most demanding standards of quality and reliability there is no substitute for a Homag.

Auckland

19 Allens Road, East Tamaki
Auckland 2013
Ph (09) 271 7700
Fax (09) 271 7728

Christchurch

159 Ferry Road, Waltham
Christchurch 8011
Ph (03) 366 2013
Fax (03) 366 2021

Call free: 0800 522 577

Copyright © 2025 W & R Jack Limited.



Overview and features

(Please note specifications vary by model)

- For banding edges of up to 3 mm and workpieces of up to 40 mm (60 mm - 1120 F / 1130 FC)
- Also available with joint trimming unit for a perfect cut and optimum glue joint quality
- Glue applied directly onto the workpiece to ensure constant application (i.e. for processing of PUR-glue).
- Two-motor end-trimming unit for optimum cutting results
- Contour trimming unit for rounding corners
- Freely configurable post-processing for a high level of flexibility
- Zero joints - airTec unit for a perfect zero joint finish

Specifications

Feed speed	8m/min
Panel thickness	8 - 40 (opt 60mm)
Tape thickness	0.3 - 3mm
Solid strip thickness	0.3 - 3mm

Machines in the EDGETEQ range include:

Model 1110
Model 1110 F
Model 1120 C
Model 1120 FC
Model 1120 F
Model 1130 FC
Model 1130 AT

Specifications are subject to change without notice.